


REGARD 4-20 mA

The REGARD 4-20mA single channel control card is a universal control card for all analogue gas detectors. Each card is fully configurable to match the parameters of an associated gas detector. The control card is fully independent and standalone, or can be addressed to interface with other system cards.


Features and Benefits

- Measuring for Tox, Ex or O₂
- Suitable for all 2/3 wire transmitters
- Fully configurable
- Simple operation
- Continuous display
- Password protected

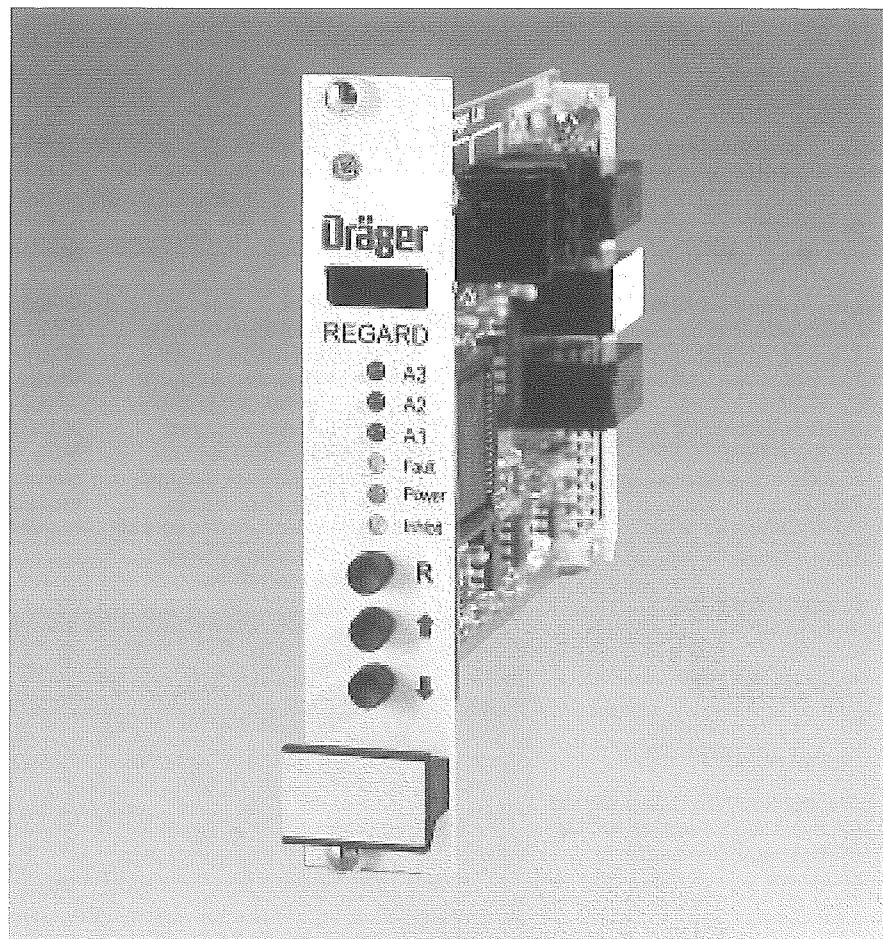

57-639-99

Technical Data

Control Card	Local alphanumeric display Front panel push buttons Front panel LED's
Inputs	2/3 wire 4-20 mA transmitters Remote reset
Outputs	A 1, A 2 and F/A 3 alarm relays Repeat 4-20 mA
Power Supply	24 V DC, 125 mA
Measuring Ranges	0-1 to 0-9999
Units of Measure	vol%, ppm, LEL and many others
Gas Names	H ₂ S, CL ₂ , O ₂ , CH ₄ and many others
Approvals 	Designed to EMC EN 50081-1 and 50082-2

Order List

REGARD 4-20 mA	42 05 701
REGARD 4-20 mA (DMT)	42 06 307

Dräger
Sicherheitstechnik GmbH
Revalstrasse 1
D - 23560 Luebeck
Germany
Tel. + 49 451 8 82 - 27 94
Fax + 49 451 8 82 - 49 91

Dräger Ltd.
Ullswater Close
Kitty Brewster Industrial Estate
Blyth, Northumberland, NE24 4RG
United Kingdom
Tel. + 44 1670 352891
Fax + 44 1670 356266

Dräger Industrie S.A.
3c, Route de la Fédération
F - 67025 Strasbourg Cedex
France
Tel. + 33 388 407676
Fax + 33 388 407667

Dräger Safety, Inc.
10450 Stancliff
Suite 220
Houston, TX 77099
USA
Tel. + 1 281 498 1082
Fax + 1 281 498 5190

Dräger South East Asia Pte Ltd.
67, Ayer Rajah Crescent #06-03
SGP-139950 Singapore
Singapore
Tel. + 65 872 9288
Fax + 65 773 2033


**Beijing Fortune Dräger Safety
Equipment Co., Ltd.**
Jixiang Lu. B Area
Beijing
Tianzhu Airport Industrial Zone
Houshayu
Shunyi County
Beijing, 101300
P.R. China
Tel. + 86 10 80498000
Fax + 86 10 80498005

DrägerService

Dräger equipment must always be fully operational and safe. DrägerService offers a regular inspection service and is quickly available in the event of malfunction. Your equipment will be repaired and back in operation as quickly as possible. DrägerService facilitates the vital flow of information between client and manufacturer.

Dräger Expertise

Since 1889, Dräger has had an outstanding reputation for solving problems in the field of human breathing. Dräger has been deeply involved in the handling of gases, in particular hazard protection and the saving of life in medical and industrial emergencies. Many of the company's 8500 employees are active in research and innovation to ensure that the latest techniques and scientific advances are fully tested before their inclusion in new equipment.

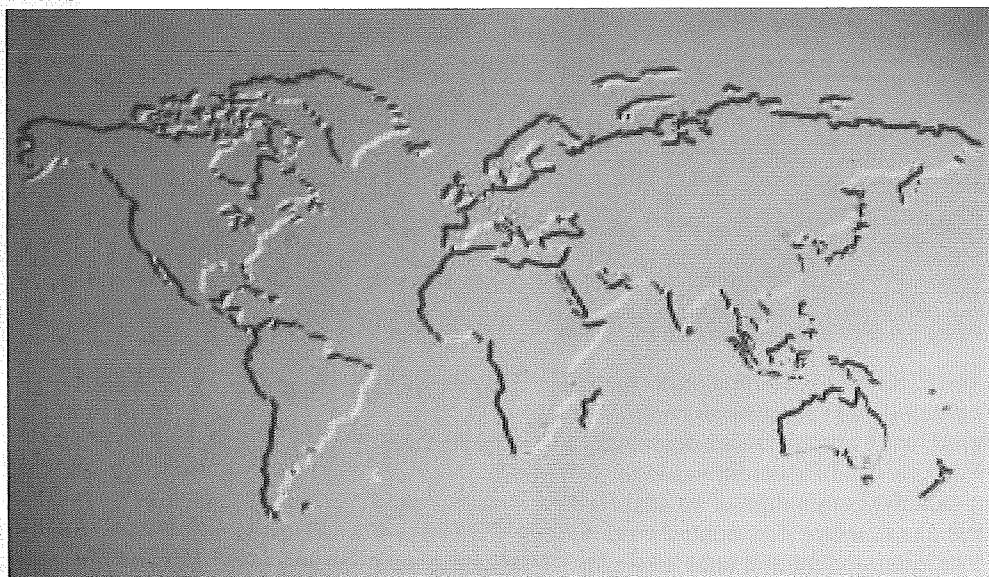

Dräger Worldwide

The Dräger sales and service organisation is spread throughout the world. It comprises more than 25 subsidiaries and associated companies to ensure that Dräger is always within easy reach of its clients and in close contact with all important markets. Dräger's ever increasing market share demonstrates the company's international competitiveness and strength.

Dräger has subsidiaries in the following countries: Australia, Austria, Belgium, Bulgaria, Canada, China, Croatia, Czech Republic, Denmark, France, Great Britain, Hungary, Indonesia, Italy, Japan, the Netherlands, Norway, Romania, Singapore, South Korea, Slovenia, Slovakia, South Africa, Spain, Sweden, Switzerland, Yugoslavia, USA. Additionally, Dräger is widely represented in Central and South America, Africa, the Middle East, the Far East and Eastern Europe.

Visit us at:
www.draeger.com/gds

Represented by:

Quality and Environmental Management

Our mission includes the continuous improvement of our Quality and Environmental Management Systems in accordance with ISO 9001 and ISO 14001.